


**PLAN VIEW**


**NOTE:**  
 COMES WITH STANDARD  
 686mm [27"] dia. FRAME & COVER  
 OPENING BUT IS AVAILABLE WITH  
 VARIOUS OPENINGS.

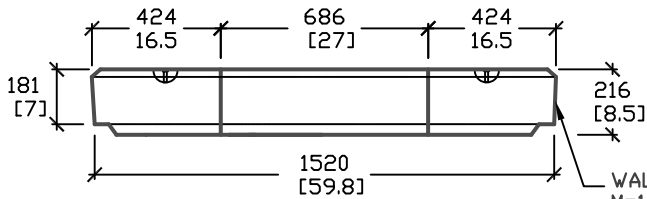

**CROSS SECTION 'A'**

WALL HAS A SLOPE OF  
 $M=17.33\text{mm [0.7]}$

SWIFT LIFT HOOK SYSTEM

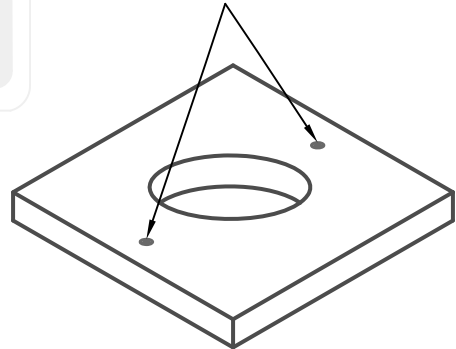

**ISOMETRIC VIEW**

ALL DIMENSIONS DEFAULT TO MILLIMETERS

mm  
[in.]



61 BONGARD AVE  
 OTTAWA, ON,  
 PH: 800.267.6466  
 FAX: 613.225.1681

www.utilitystructures.com

**NOTES:**

DESIGNED TO CL-625-DNT TRUCK  
 LIVE LOADING AS PER CSA S6-06  
 USE WITH BASE E60

\*CSA 23.4-05  
 35MPa (5000psi) AT 28 DAYS  
 6-8% AIR ENTRAINED

REV.#	MM/DD/YYYY	PREP.
2	FEB/26/2009	LRW
3	APR/07/2009	LRW

**E-61**

ELECTRICAL MANHOLE PAD

WEIGHT = 1095kg/2400lbs

**1520mm x 1520mm [O.D.]**