




LOAD REQUIREMENTS	
DISTRIBUTED LATERAL LOAD	25 kN/m <sup>2</sup>
TOP SLAB DISTRIBUTED LOAD	60 kN/m <sup>2</sup>
TOP SLAB POINT LOAD	70 kN

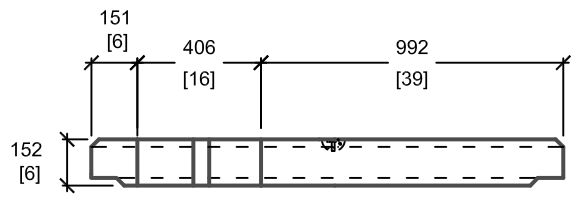


**CROSS SECTION 'B'**

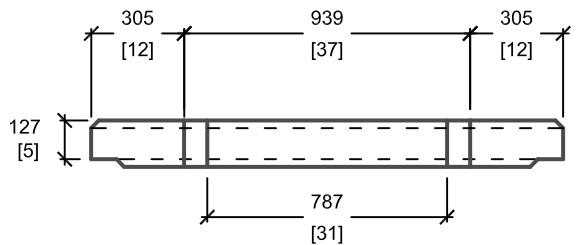

**CROSS SECTION 'A'**

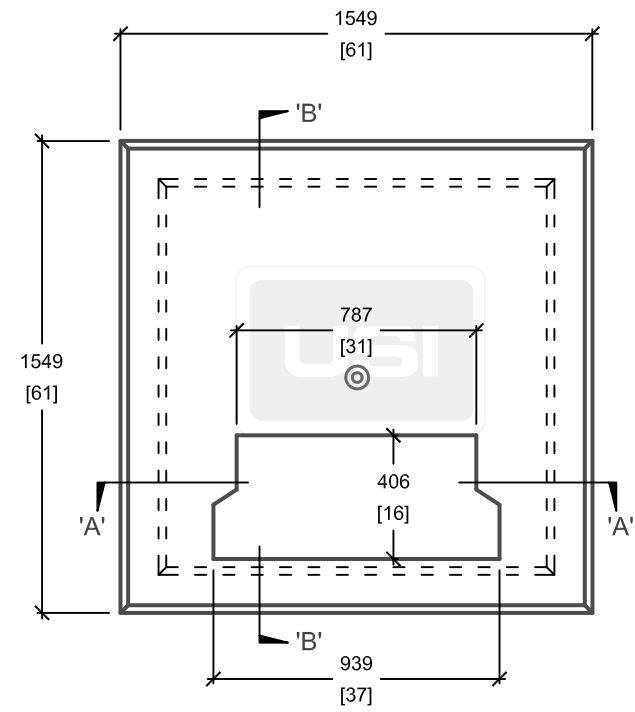

**PLAN VIEW**

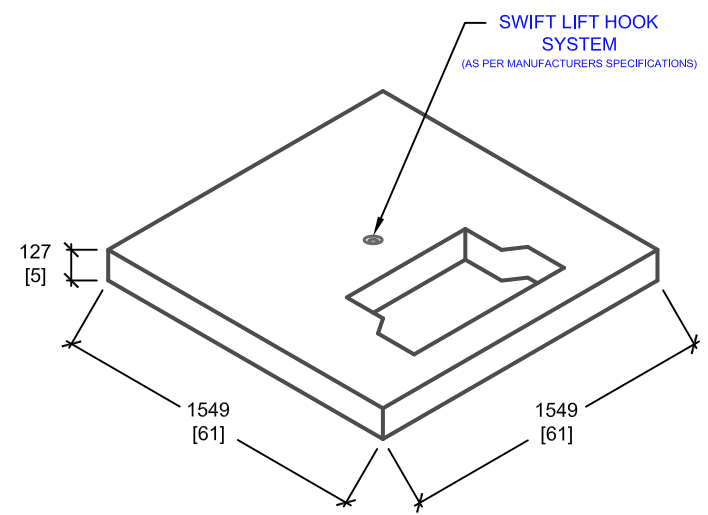

**ISOMETRIC VIEW**

mm  
[Inches]  
ALL DIMENSIONS DEFAULT TO MILLIMETRES



**UTILITY STRUCTURES INC.**

61 BONGARD AVE | OTTAWA, ON | K2E 6V2  
T: 613.225.6398 F: 613.225.1681 TF: 800.267.6466

[www.utilitystructures.com](http://www.utilitystructures.com)

**CONSTRUCTION DETAILS:**

- 150kVA TO 1000kVA
- USE WITH BASE E4

• **CSA 23.4**

- 35 MPa (5000psi) AT 28 DAYS
- STRIPPING STRENGTH: MIN. 20 MPa(2900psi)
- 5-8% AIR ENTRAINED
- EXPOSURE CLASS: C-1
- REINFORCING: STEEL TO CSA CAN A23.1

**PRODUCT DETAILS:**

- PAD OPENING: 406mm[16"] x 939mm[37"]
- CUSTOM OPTIONS AVAILABLE
- CUSTOM OPENINGS

**PRODUCT CODE:**

**E-5**

THREE PHASE TRANSFORMER PAD

**OUTSIDE DIMENSIONS:**

**1549mm x 1549mm [O.D.]**

**TOTAL WEIGHT:**

**715 kg / 1800 lbs**

**REVISION DATE:**

**SEPTEMBER 14, 2017**

REV. # 3