


SPECIFYING INFORMATION

STYLE SERIES	OVERALL HEIGHT	CLASS [STRENGTH]	FINISH OPTIONS	COLOUR OPTIONS	FIXTURE MOUNT OPTIONS	OPTIONS
HA Hampton	XXX Total Height in feet [x 10] 150 Shortest ↓ 175 200 225 • • • 800 825 ↓ 850 Tallest	X See Table Ranges from AL to O AL Light Duty ↓ A B C • • • M N ↓ O Heavy Duty	1 Mold Finish 2 Polished 3 Etched 4 Exposed Aggregate	PG Plain Grey AJ Aztec Jade BE Black Eclipse DB Dark Bronze DS Desert Sand ML Midnight Lace OJ Oriental Jade SP Salt & Pepper SB Seluki Bronze VW Venetian White	10 Side Mount Through Bolts 20 Side Mount Inserts 30 Steel Tenon Post Top 40 Concrete Tenon Post Top 50 Top Mount Round 55 Top Mount Octagonal 60 Scroll Arm 70 Clamp On 80 Camera Mount 90 Custom Mount	X Capseal X75 B Base Mount S Base Shroud F Fin Cap R GFI Receptacle A Banner Arm L Ladder Rest C Custom Accessory
MA Madison						
OX Oxford						
CA Cambridge						
ST Stratford						
GR Grandview						
RO Rockcliffe						
WE Westmount						
NE Newport						
PA Parkdale						
TH Thompson						
WA Washington						

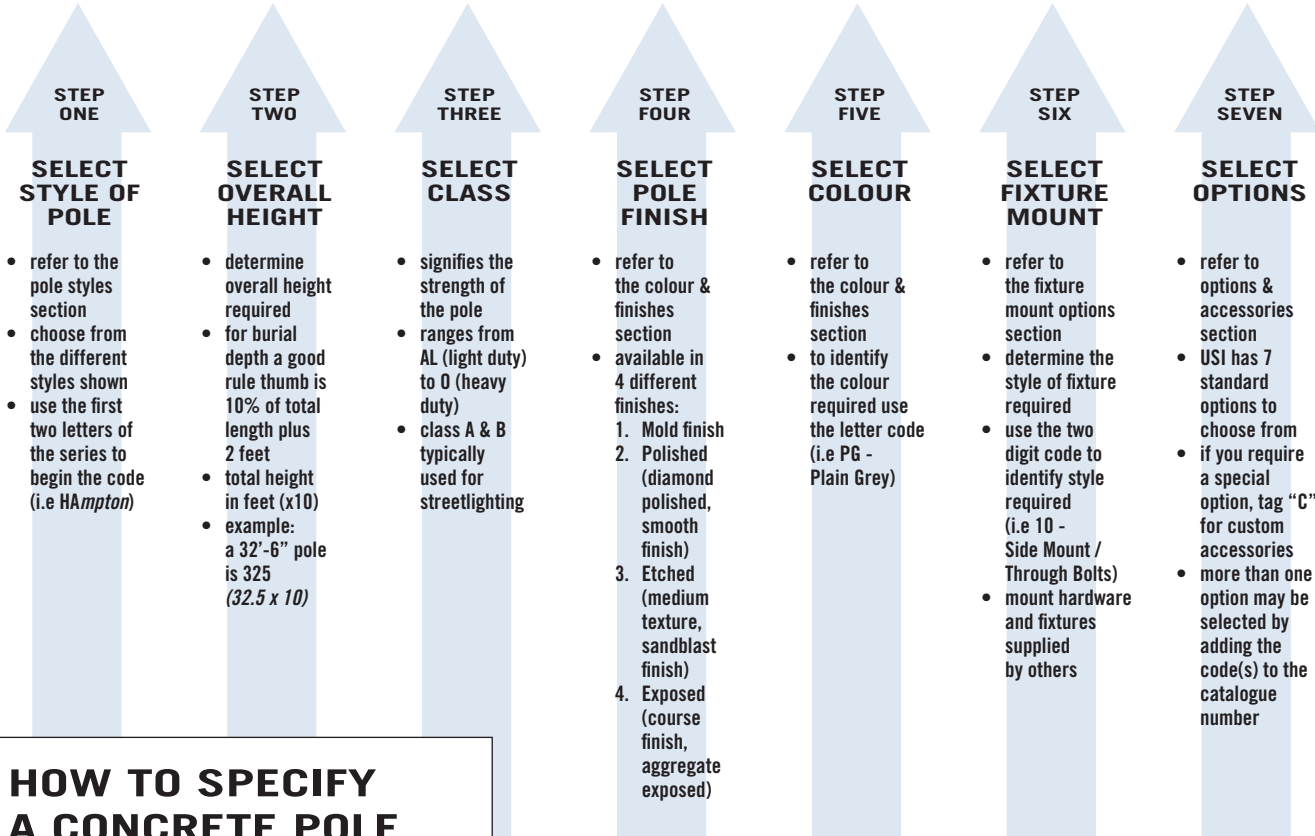

HOW TO SPECIFY A CONCRETE POLE

First you must determine the application; STREETLIGHTING, LANDSCAPE/PATHWAY LIGHTING, SPORTSLIGHTING, UTILITY/DISTRIBUTION.

Then follow steps One through Seven and you're on your way to specifying the pole of your choice.



61 BONGARD AVENUE, OTTAWA, ONTARIO CANADA K2E 6V2
 TEL: [613] 225-6398 • FAX: [613] 225-1681 • TOLL FREE: 1-800-267-6466
www.utilitystructures.com

USI POLE COMPARISON CHART

POLE STYLES & FEATURES	HA	MA	OX	CA	ST	GR	RO	WE	NE	PA	TH	WA
CROSS SECTION OF SHAFT												
Round	•						•		•			
Octagonal		•		•	•			•		•		
Square			•								•	
Fluted						•						•
HEIGHT RANGE ABOVE GRADE												
10' to 16'	•	•	•		•	•	•	•	•		•	•
17' to 25'	•	•	•	•			•	•	•	•	•	•
26' to 45'	•	•							•		•	•
Greater than 45'	•											
CLASS / STRENGTH OF POLE												
AL, A, B (light duty)	•	•	•	•	•	•	•	•	•	•	•	•
C, D, E, F (medium duty)	•	•							•			
G, H, I, J, K, L, M, N, O (heavy duty)	•											
SURFACE FINISHES												
1 - Mold finish	•	•	•	•	•	•	•	•	•	•	•	•
2 - Polished and sealed		•	•	•	•			•		•	•	
3 - Etched and sealed	•	•	•	•	•	•	•	•	•	•	•	•
4 - Exposed aggregate	•	•	•	•	•	•	•	•	•	•	•	•
COLOURS												
PG - Plain Grey	•	•	•	•	•	•	•	•	•	•	•	•
AJ - Aztec Jade	•	•	•	•	•	•	•	•	•	•	•	•
BE - Black Eclipse	•	•	•	•	•	•	•	•	•	•	•	•
DB - Dark Bronze	•	•	•	•	•	•	•	•	•	•	•	•
DS - Desert Sand	•	•	•	•	•	•	•	•	•	•	•	•
ML - Midnight Lace	•	•	•	•	•	•	•	•	•	•	•	•
OJ - Oriental Jade	•	•	•	•	•	•	•	•	•	•	•	•
SP - Salt and Pepper	•	•	•	•	•	•	•	•	•	•	•	•
SB - Seluki Bronze	•	•	•	•	•	•	•	•	•	•	•	•
VW - Venetian White	•	•	•	•	•	•	•	•	•	•	•	•
MOUNTING STYLES												
10 - Side mount / through bolts	•	•	•	•	•		•	•	•	•	•	•
20 - Side mount / inserts	•	•	•	•	•		•	•	•	•	•	•
30 - Steel tenon post top	•	•	•	•	•	•	•	•	•	•	•	•
40 - Concrete tenon post top	•					•	•	•	•	•		
50 - Top mount / round	•						•		•			
55 - Top mount / octagonal		•		•	•			•		•		
60 - Scroll arm	•	•	•	•	•		•	•	•	•	•	•
70 - Clamp on	•						•		•			
80 - Camera mount	•	•							•			
90 - Custom mount	•	•	•	•	•	•	•	•	•	•	•	•
OPTIONS & ACCESSORIES												
X - Capseal X75 sealer	•	•	•	•	•	•	•	•	•	•	•	•
B - Base mounted	•	•	•	•	•	•	•	•	•	•	•	•
S - Base shroud	•	•	•	•	•				•		•	
F - Fin cap		•		•	•			•				
R - GFI Receptacle	•	•	•	•	•	•	•	•	•	•	•	•
A - Banner arms	•	•	•	•	•	•	•	•	•	•	•	•
L - Ladder rests	•	•	•	•	•	•	•	•	•	•	•	•
C - Custom accessory	•	•	•	•	•	•	•	•	•	•	•	•
APPLICATIONS												
Streetlighting	•	•	•	•	•	•	•	•	•	•	•	•
Landscape / Pathway Lighting	•	•	•	•	•	•	•	•	•	•	•	•
Sportlighting	•	•							•			
Utility / Distribution	•											